

hoppt WALK-BEHIND POWER TROWELS

✓ **HOPPT®** wide range of Power Trowels are designed with various options to help concrete professionals for their applications.

Powered by :  **SUBARU**  **HONDA**
Robin Industrial Products **ENGINES**



✓ **HOPPT®** Power Trowels are **powered by ROBIN® or the HONDA® 4-stroke petrol engines.** The Gearboxes are precision-engineered to transfer maximum torque to the trowel rotor, for a long trouble-free life. *The cast-iron GGG spiders, pressure plates and lift levers provide for longer-lasting life. The bushings, trowel arms and spiders are precision-machined to close tolerance.* The high-strength steel handle provides maximum comfort and control.

✓ **HOPPT®** Range of *Edging Trowels* are the perfect choice for trowelling *along the edges of walls or around protruding pipes and conduits*, after usage of HOPPT® Power Trowels. With the availability of various dimensions and sizes, they are versatile even for working in the narrowest places.



TOL60G Edging Trowel

Full-Folding Handle Design-
First Developed by HOPPT®



TOL100GB Power Trowel





MODEL	TOL60G	TOL70G	TOL75G
MACHINE DIMENSION - L x W x H (mm)	1,510 x 630 x 993	1,950 x 700 x 700	1,520 x 750 x 990
OPERATING WEIGHT - (kg)	56	70	64
GUARD RING DIAMETER - (mm)	630	700	750
HANDLE TYPE	Foldable (Full-Fold)	Straight	Foldable (Half-Fold)
BLADE OPERATING SPEED - (rpm)	85 - 138	50 - 130	85 - 138
MAX. BLADE PITCH ANGLE - (°)	15	15	15
FINISHING BLADE SIZE - L x W (mm)	230 x 120	266 x 150	270 x 120
ENGINE OPTIONS	ROBIN® EX13 @ 3.2kW (4.3hp) 4-Stroke Petrol	ROBIN® EX17 @ 4.2kW (6.0hp) 4-Stroke Petrol	ROBIN® EX17 @ 4.2kW (6.0hp) 4-Stroke Petrol
	ROBIN® EY20-3C @ 3.7kW (5.0hp) 4-Stroke Petrol	ROBIN® EY20-3C @ 3.7kW (5.0hp) 4-Stroke Petrol	ROBIN® EY20-3C @ 3.7kW (5.0hp) 4-Stroke Petrol
	HONDA® GX160 @ 3.6kW (4.8hp) 4-Stroke Petrol	HONDA® GX160 @ 3.6kW (4.8hp) 4-Stroke Petrol	HONDA® GX160 @ 3.6kW (4.8hp) 4-Stroke Petrol
	HATZ® Diesel Engines Available	HATZ® Diesel Engines Available	HATZ® Diesel Engines Available



Client's HOPPT® TOL90GB -
At Work in MALAYSIA

MODEL	TOL90GB	TOL100GB	TOL120GB
MACHINE DIMENSION - L x W x H (mm)	1,920 x 992 x 1,075	1,832 x 1,000 x 1,026	2,020 x 1,200 x 1,076
OPERATING WEIGHT - (kg)	77	83	95
GUARD RING DIAMETER - (mm)	992	1,000	1,200
HANDLE TYPE	Straight	Straight	Straight
BLADE OPERATING SPEED - (rpm)	50 - 150	50 - 150	50 - 150
MAXIMUM BLADE PITCH ANGLE - (°)	15	15	15
FINISHING BLADE SIZE - L x W (mm)	356 x 151	356 x 151	458 x 151
ENGINE OPTIONS	ROBIN® EX17 @ 4.2kW (6.0hp) 4-Stroke Petrol	ROBIN® EX17 @ 4.2kW (6.0hp) 4-Stroke Petrol	ROBIN® EX27 @ 6.6kW (9.0hp) 4-Stroke Petrol
	ROBIN® EY20-3C @ 3.7kW (5.0hp) 4-Stroke Petrol	ROBIN® EY20-3C @ 3.7kW (5.0hp) 4-Stroke Petrol	ROBIN® EX27 @ 6.6kW (9.0hp) 4-Stroke Petrol
	HONDA® GX160 @ 3.6kW (4.8hp) 4-Stroke Petrol	HONDA® GX160 @ 3.6kW (4.8hp) 4-Stroke Petrol	HONDA® GX270 @ 6.3kW (8.5hp) 4-Stroke Petrol
	HATZ® Diesel Engines Available	HATZ® Diesel Engines Available	HATZ® Diesel Engines Available

FEATURING HIGH-QUALITY COMPONENTS & FEATURES



Heavy-Duty Gear Box
For 'GB' Models



HOPPT® Screw-Pitch
Control System (Standard)



HOPPT® Quick-Pitch
Control System (Optional)



Central Lifting Point



Easy Shifting - Lift-Up Bar




Vibration-Reduction Handle



Safety Lever




Safety Kill-Switch

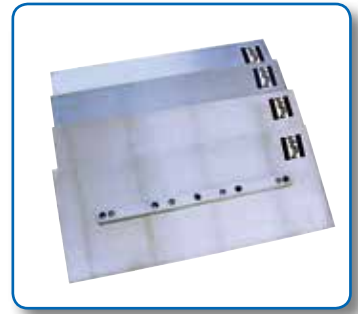

HOPPT® Finishing Blades



HOPPT® Combination Blades



HOPPT® Float Pan



Revolutionary Brush System
for Surface Cleaning



- ✓ Trowel Fitted with the Revolutionary Brush System
- ✓ Easy Brushing of Gaps Between Tiles